






# 5SFM Low Profile Solenoids Push or Pull

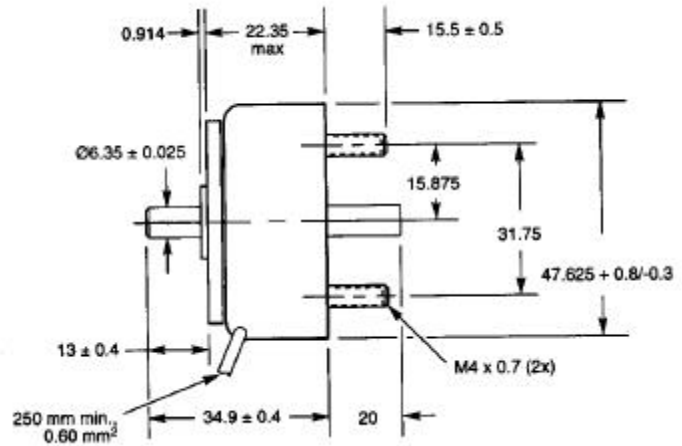

5SFM Short Stroke, Flat Face  
Part No. : 282349-0XX

Shown Energised

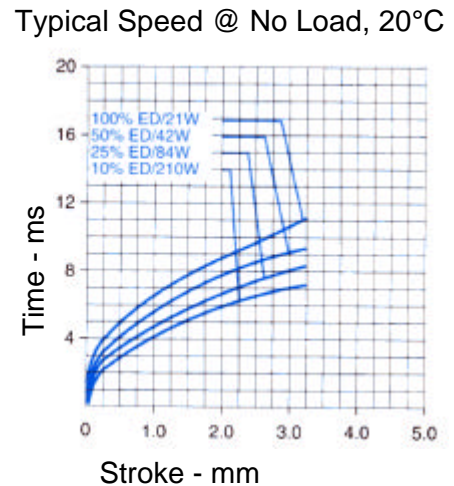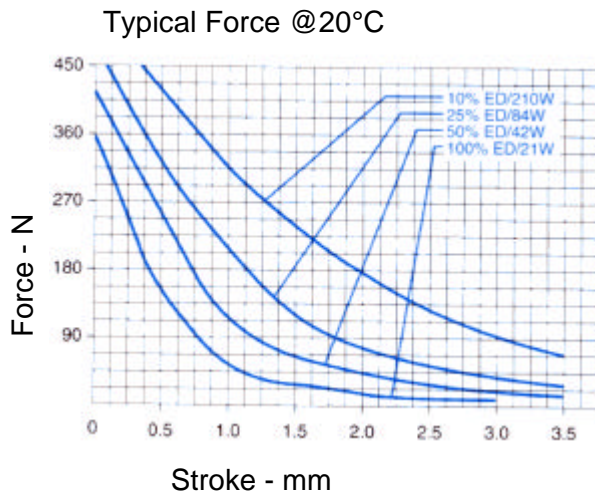

## COIL DATA

Maximum Duty Cycle (%) = "On" Time / ("On" Time + "Off" Time) X 100%			Continuous	50%	25%	10%
MAX. "on" time in seconds			—	100	36	10
Watts at 20°C			21	42	84	210
Maximum ON Time (sec) for single pulse <sup>2</sup>			—	160	44	13
Ampere-turns at 20°C			860	1220	1720	2730
avg (0XX) <sup>3</sup>	Resistance (20°C) Ω +10%	No.turns	Volts DC			
23	2.03	288	6.1	8.6	12.1	19.2
24	3.20	360	7.6	10.8	15.3	24.0
25	4.91	440	9.6	13.6	19.2	31.0
26	7.72	550	12.1	17.1	24.0	38.0
27	11.12	636	15.0	21.0	30.0	48.0
28	18.79	840	19.2	27.0	39.0	61.0

N.B. Other coil avg sizes available— Please consult factory