






7SFM Low Profile Solenoids Push or Pull

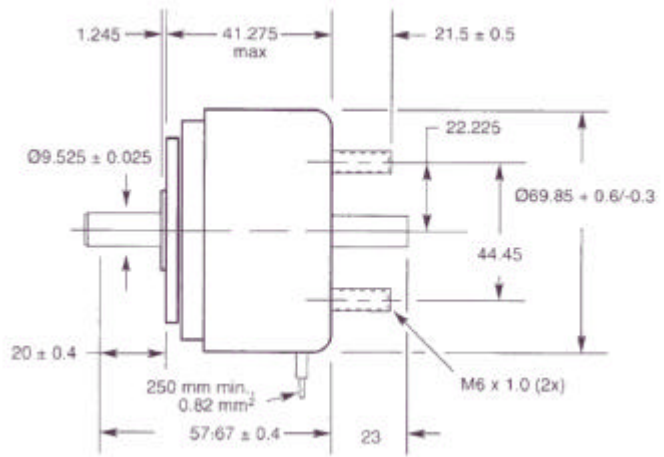

7SFM Short Stroke, Flat Face
Part No. : 282353-0XX

Shown Energised

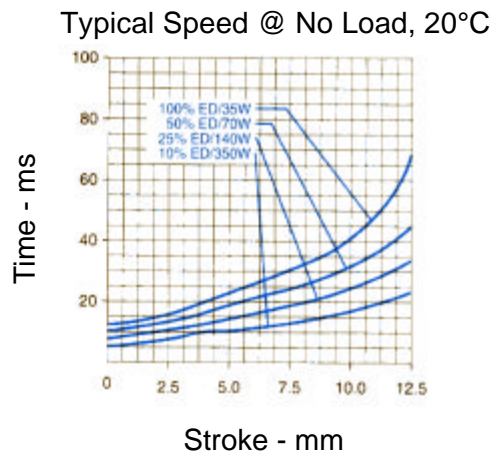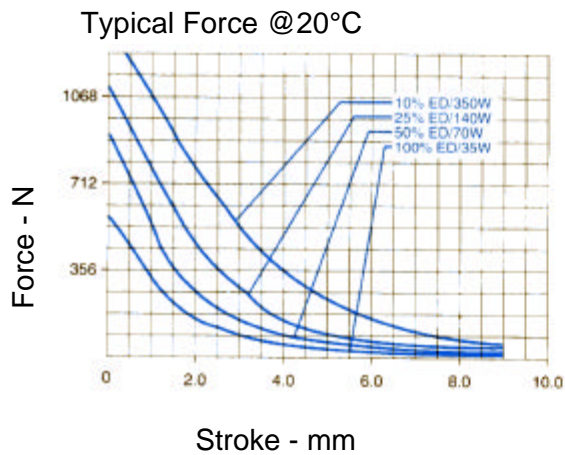

COIL DATA

<i>Maximum Duty Cycle (%) = "On" Time / ("On Time" + "Off Time") X 100%</i>			Continuous	50%	25%	10%
MAX. "on" time in seconds			—	80	38	16
Watts at 20°C			35	70	140	350
Maximum ON Time (sec) for single pulse ²			—	138	50	18
Ampere-turns at 20°C			1570	2230	3150	5000
avg (0XX) ³	Resistance (20°C) Ω +10%	No.turns	Volts DC			
23	8.09	780	16.3	23.0	33.0	52.0
24	12.34	949	21.0	29.0	41.0	65.0
25	18.62	1148	26.0	37.0	52.0	83.0
26	30.84	1472	33.0	47.0	66.0	105.0
27	48.77	1854	41.0	59.0	83.0	132.0
28	81.14	2436	52.0	74.0	105.0	167.0
29	121.00	2944	65.0	92.0	130.0	206.0

N.B. Other coil awg sizes available— Please consult factory