


Push or Pull Linear

General Specifications:

- **Dielectric Strength:** 1000 VRMS;
- **Recommended Heat Sink:** Maximum watts dissipated by the solenoid are based on an unrestricted flow of air at 20° C mounted on the equivalent of an aluminium plate 102x102x3.2mm min.
- **Coil Resistance:** +/- 5% tolerance
- **Holding Force:** 29.4 N @ 20° C
- **Weight:** 176.8 g Pull / 171 g Push.
- **Plunger Weight:** 40.6 g Pull / 30.2 g Push.

Part Number: Pull SDT2652L-2XX
Push SDT2652S-2XX

Solenoid shown in energised position.

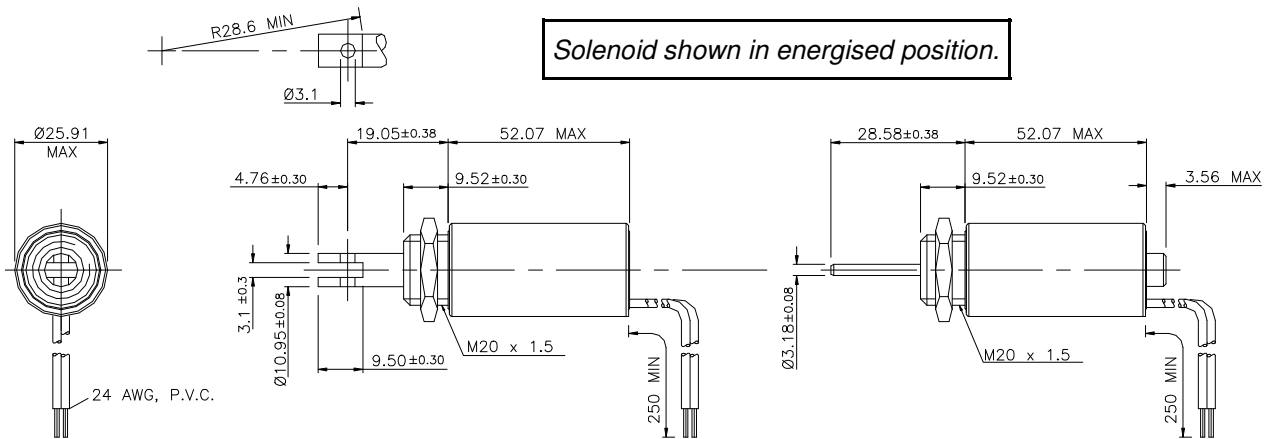

Coil Specifications


Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (seconds) When pulsed continuously ¹	∞	360	32	8
Maximum ON Time (seconds) for single pulse ²	∞	470	120	32
Watts (@20° C)	10	20	40	100
Ampere Turns (@ 20° C)	1166	1649	2332	3688

Coil Data

awg. (2xx) ³	Resistance (@ 20°C)	# Turns ⁴	Nominal DC Voltage			
			4.4	6.3	8.9	14.0
23	1.96	536	4.4	6.3	8.9	14.0
24	2.69	600	5.2	7.3	10.4	16.4
25	4.89	840	7.0	9.9	14.0	22.0
26	8.44	1128	9.2	13.0	18.4	29.0
27	11.5	1260	10.7	15.2	21.0	34.0
28	19.2	1645	13.8	19.6	28.0	44.0
29	31.2	2104	17.7	25.0	35.0	56.0
30	49.6	2646	22.0	31.0	45.0	70.0
31	77.4	3280	28.0	39.0	56.0	88.0
32	119.0	4026	35.0	49.0	69.0	109.0
33	202.0	5317	45.0	64.0	90.0	142.0

Performance

Typical Starting Force @ 20°C

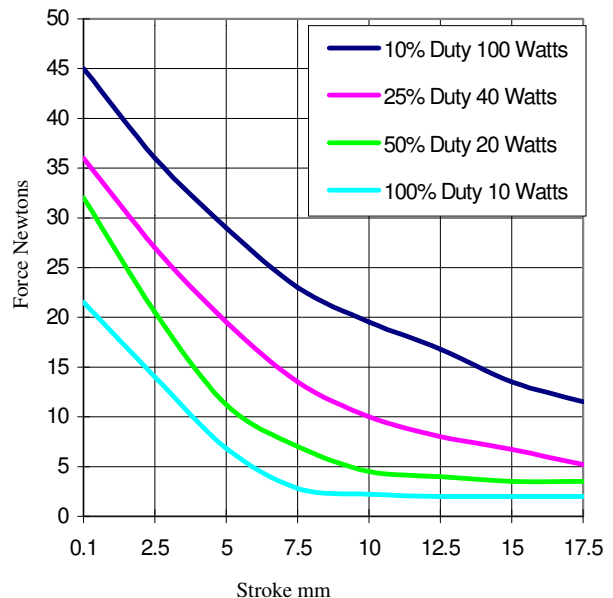

Notes:

1. Continuously pulsed at stated watts and duty cycle.
2. Single pulsed at stated watts (with coil at ambient room temperature 20° C).
3. Other coil gauges available, consult factory.
4. Reference number of turns.
5. Anti rotational mounting bushes available on request.

How to Order:

Add the coil awg number to the part number, alternatively please specify; Voltage / Duty cycle / Starting Force / Stroke required and any special requirements.