
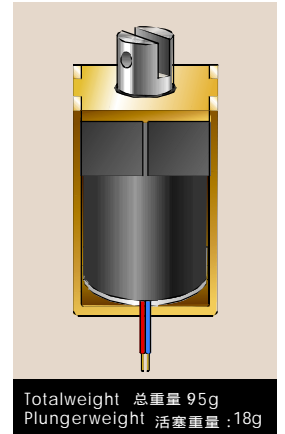


KEEP SOLENOID SDK-1037L

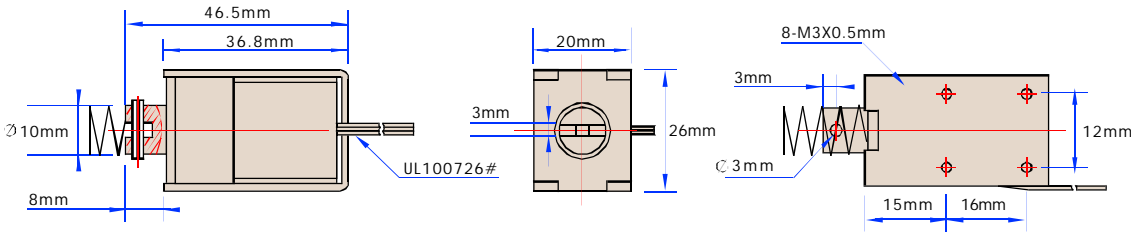


ORDERING INFORMATION 代号编排

SD K-10 37 L- * * * - *

ZANTY 宗泰
Keep Solenoid 保持螺线管
Plunger dia(mm) 滑杆直径(mm)
Frame length(mm) 框架长度(mm)

外线电阻 : * Ω
内线电阻 : * Ω
Serial number 序号
Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
L: Pull Type 吸入式 S: Push Type 推出式

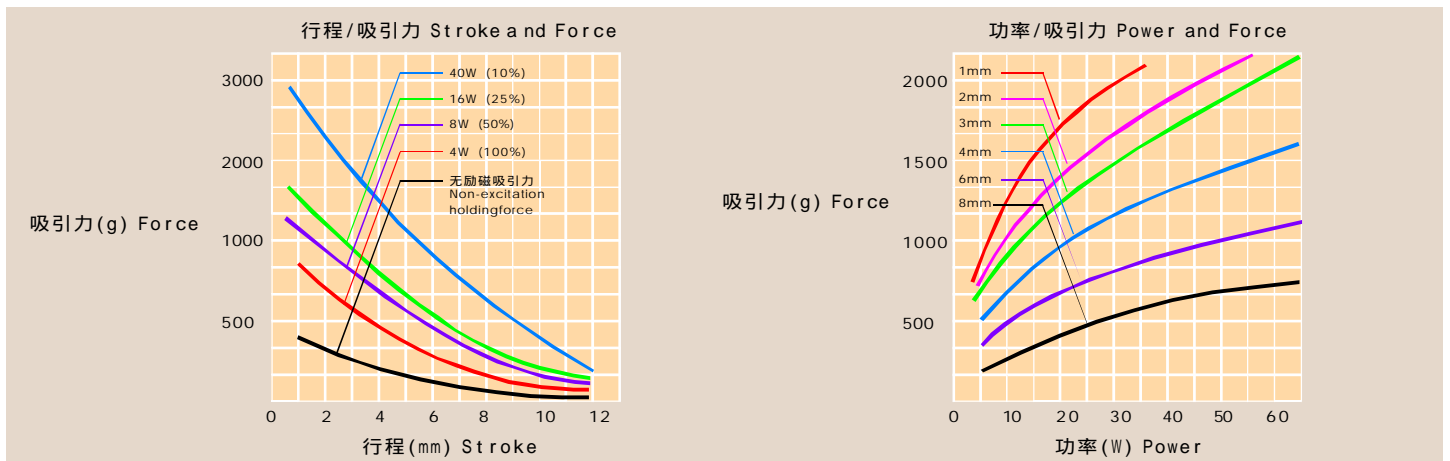

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle(100%) "ON" time/"ON" time+"OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	160	90	30
20°C 时的功率 watt at 20°C		4	8	16	40
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDK-1037L-06A	4.5	4.2	6	8.5	13.4
SDK-1037L-12A	18	8.5	12	17	26.8
SDK-1037L-24A	72	17	24	34	53.6
SDK-1037L-48A	288	34	48	67.8	107.2



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112
Tel.: (+86-755) 2854 3752, 28542115 Fax: (+86-755) 28543458
E-mail: zanty@public.szptt.net.cn Website: www.zanty.com