
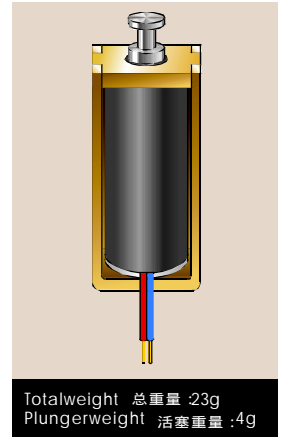


OPEN FRAME SOLENOID SDO-0530L

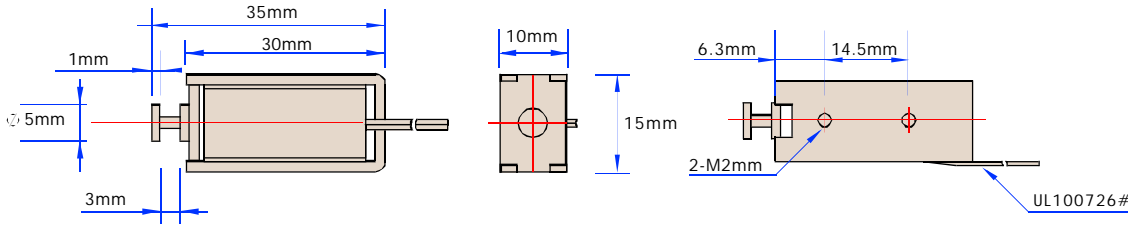


ORDERING INFORMATION

代号编排

SD O-05 30 L- * * *

ZANTY 宗泰
Open Frame Solenoid 开置式螺线管
Plunger dia(mm) 滑杆直径(mm)
Frame length(mm) 框架长度(mm)

Coil Resistance 线圈电阻 : * Ω
Serial number 序号
Voltage 电压 : 06:DC6V 12:DC12V 24:DC24V 48:DC48V
L: Pull Type 吸入式 S: Push Type 推出式

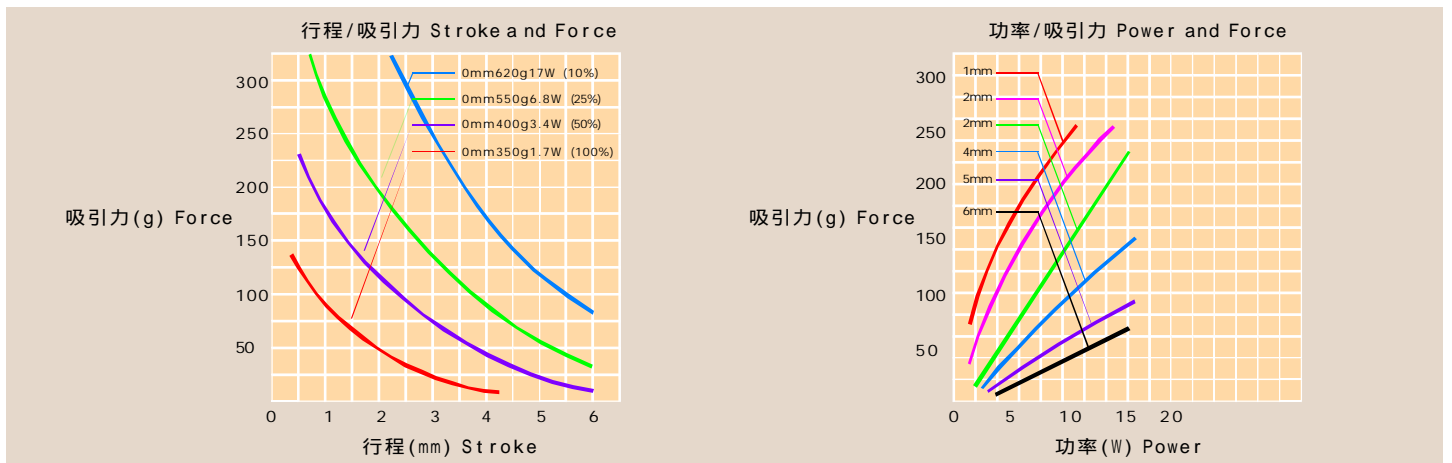

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time / "ON" time + "OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	50	18	2
20°C 时的功率 watt at 20°C		1.7	3.4	6.8	17
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-0530L-06A	21	6	8.5	12	19
SDO-0530L-12A	85	12	17	24	38
SDO-0530L-24A	339	24	34	48	76
SDO-0530L-48A	960	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112
Tel.: (+86-755) 2854 3752, 28542115 Fax: (+86-755) 28543458
E-mail: zanty@public.szptt.net.cn Website: www.zanty.com