
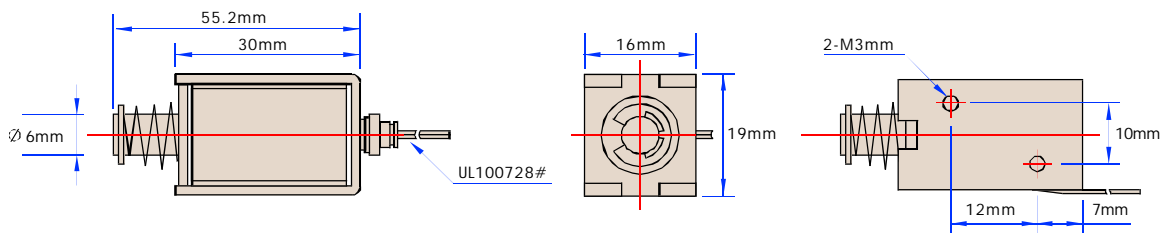




# SDO-0630S OPEN FRAME SOLENOID

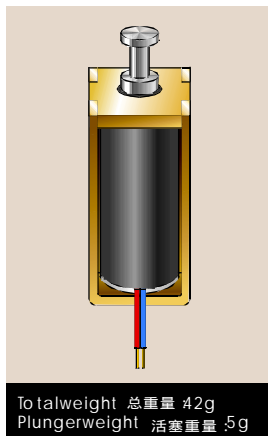

## ORDERING INFORMATION

代号编排

**SD** ZANTY 宗泰  
**O-06** Open Frame Solenoid 开置式螺线管  
**30** Plunger dia(mm) 滑杆直径(mm)  
**S-** Frame length(mm) 框架长度(mm)  
**\*** Coil Resistance 线圈电阻 : \* Ω  
**\*** Serial Number 序号  
**\*** Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V  
**L:** Pull Type 吸入式 **S:** Push Type 推出式

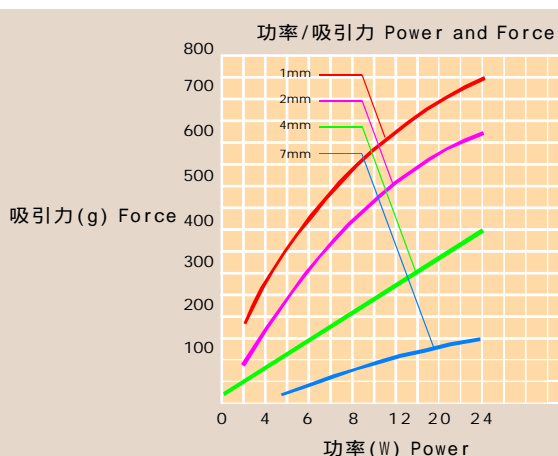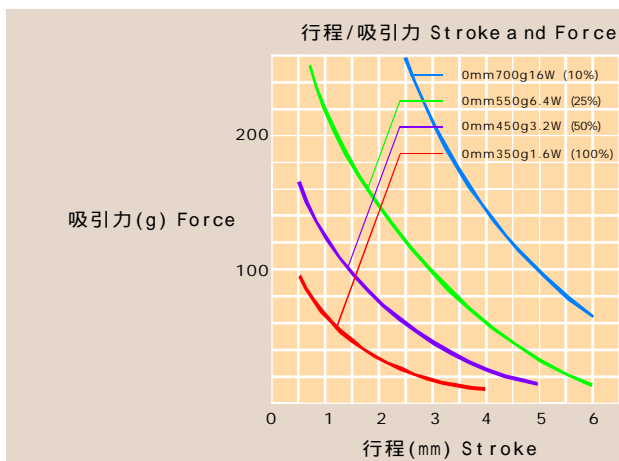

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time/"ON" time + "OFF" time	100%	50%	25%	10%	
	连通 continuous	间断 intermittent			
最大ON时间 (秒) MAX "ON" Time in second	-	55	19	3	
20°C 时的功率 watt at 20°C	2.4	4.8	9.6	24	
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-0630S-06A	15	6	8.5	12	19
SDO-0630S-12A	60	12	17	24	38
SDO-0630S-24A	240	24	34	48	76
SDO-0630S-48A	960	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112  
 Tel.: (+86-755) 2854 3752, 2854 2115 Fax: (+86-755) 2854 3458  
 E-mail: zanty@public.szptt.net.cn Website: www.zanty.com