

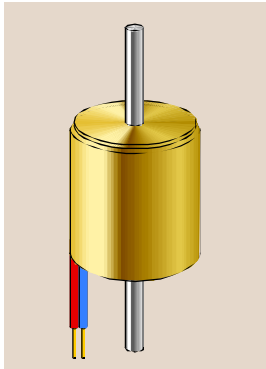


SDSL-1414L PUSH / PULL SOLENOID

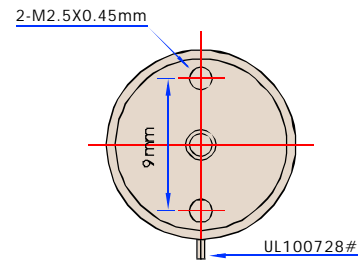


Total weight 总重量 12g
Plunger weight 活塞重量 2.5g

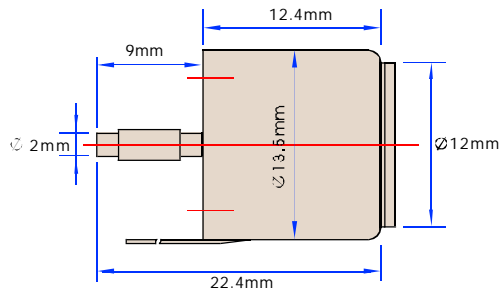

ORDERING INFORMATION 代号编排

SD SL-14 14 L- * * *

ZANTY 宗泰
PUSH/PULL Solenoid 推拉式螺线管
Tube dia(mm) 圆筒直径(mm)
Tube length(mm) 圆筒长度(mm)
Coil Resistance 线圈电阻 * Ω
Serial number 序号
Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
L: Pull Type 吸入式 S: Push Type 推出式

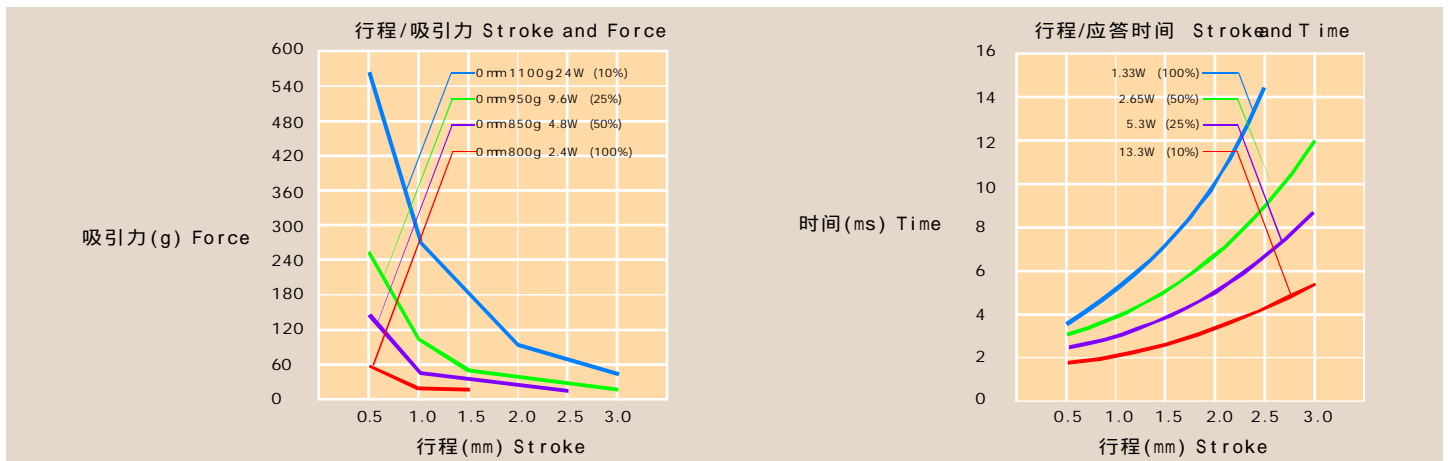

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time/"ON" time + "OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	100	36	7
20°C 时的功率 watt at 20°C		1.33	2.66	5.32	13.3
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDSL-1414L-03A	6.5	3	4.2	6	9.5
SDSL-1414L-06A	30	6	8.5	12	19
SDSL-1414L-12A	97	12	17	24	38
SDSL-1414L-24A	468	24	34	48	76



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112
Tel.: (+86-755) 2854 3752, 2854 2115 Fax: (+86-755) 2854 3458
E-mail: zanty@public.szptt.net.cn Website: www.zanty.com