



SDT-1026L TUBULAR SOLENOID


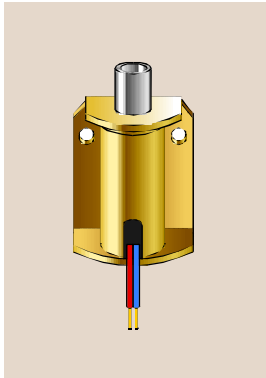


Total weight 总重量 :18g
Plungerweight 活塞重量 :3.2g

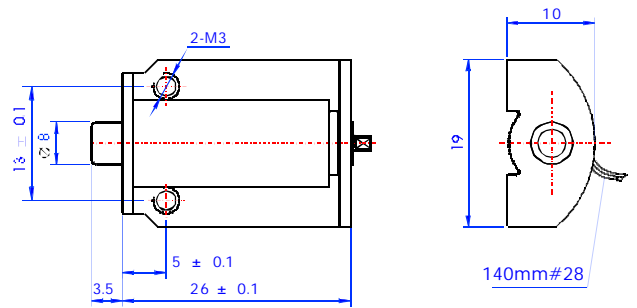

ORDERING INFORMATION 代号编排

SD T-10 26 L- * * *
 ZANTY 宗泰
 Tubular Solenoid 筒状电磁铁
 Tube dia(mm) 圆筒直径(mm)
 Tube length(mm) 圆筒长度(mm)
 Coil Resistance 线圈电阻 : * Ω
 Serial number 序号
 Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
 L: Pull Type 吸入式 S: Push Type 推出式

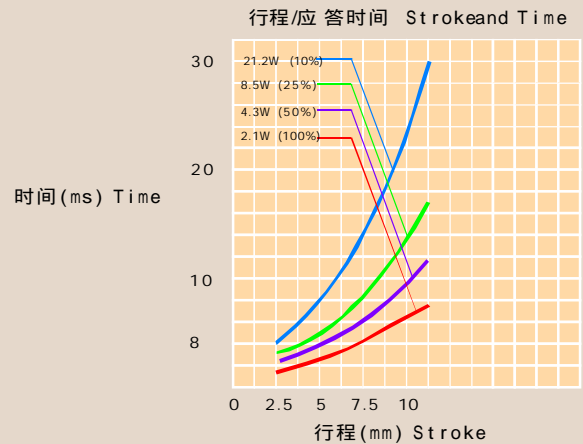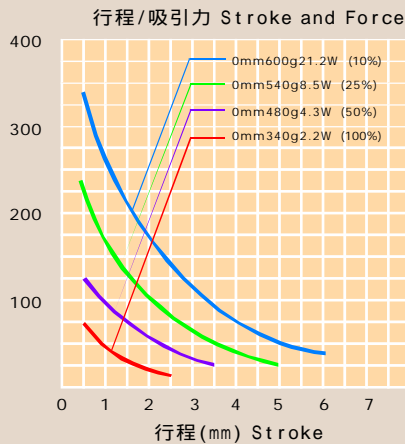

动作周期 (100%) ON时间/ON时间+OFF时间 Dutycycle(100%) "ON"time/"ON"time+"OFF"time	100%	50%	25%	10%
		连通 continuous	间断 intermittent	
最大ON时间 (秒) MAX "ON"Time insecond	-	50	18	2
20°C 时的功率 wattat20°C	2.1	4.3	8.5	21.2
型号 TYPE Number	电阻 resistanceΩ	电压 volts DC		
SDT-1026L-06A	17	6	8.5	12
SDT-1026L-12A	68	12	17	24



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2,JihuaIndustryDistrict,Shenzhen,China. P.C.:518112
 Tel.:(+86-755)2854 3752,28542115Fax:(+86-755) 28543458
 E-mail: zanty@public.szptt.net.cn Website: www.zanty.com