
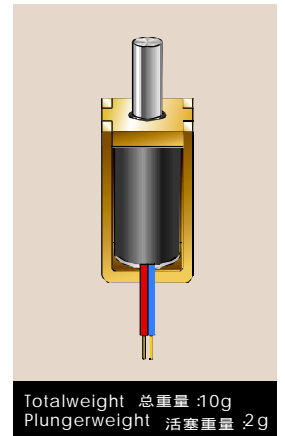



# OPEN FRAME SOLENOID SDO-0420L

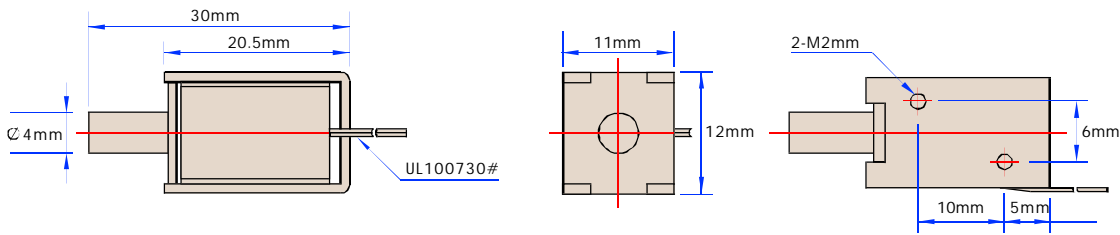

## ORDERING INFORMATION 代号编排

ZANTY 宗泰 ———— SD O-04 20 L- \* \* \*  
 Open FrameSolenoid 开置式螺线管 ————  
 Plunger dia(mm) 滑杆直径(mm) ————  
 Frame length(mm) 框架长度(mm) ————

Coil Resistance 线圈电阻 : \* Ω  
 Serialnumber 序号  
 Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V  
 L:PullType 吸入式 S:Push Type推出式

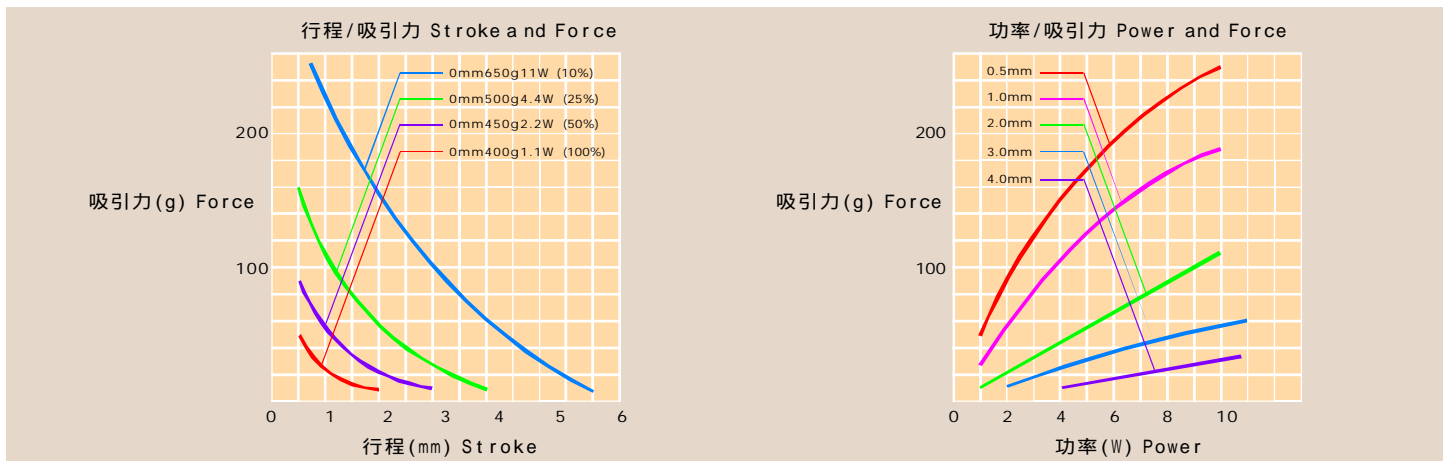

动作周期 (100%) ON时间/ON时间+OFF时间 Dutycycle(100%) "ON"time/"ON"time+"OFF"time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON"Time insecond		-	50	18	2
20°C 时的功率 wattat20°C		1.1	2.2	4.4	11
型号 TYPE Number	电阻 resistanceΩ	电压 voltsDC			
SDO-0420L-06A	30	6	8.5	12	19
SDO-0420L-12A	120	12	17	24	38
SDO-0420L-24A	480	24	33.9	48	75.9
SDO-0420L-48A	1920	48	67.9	96	151.8



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2,JihuaIndustryDistrict,Shenzhen,China. P.C.:518112  
 Tel.:(+86-755)2854 3752,28542115Fax:(+86-755) 28543458  
 E-mail: zanty@public.szptt.net.cn Website: www.zanty.com