
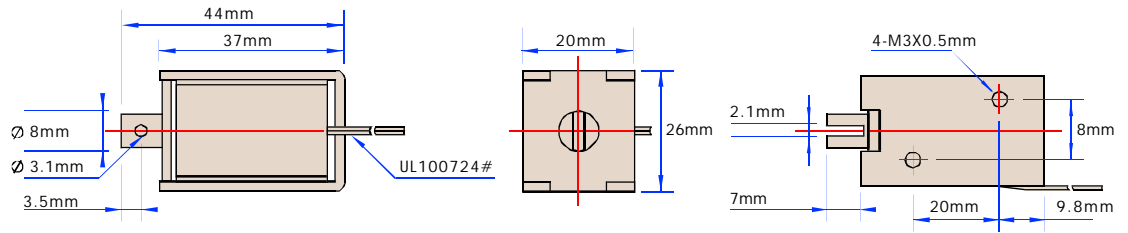


# SDO-0837L OPEN FRAME SOLENOID

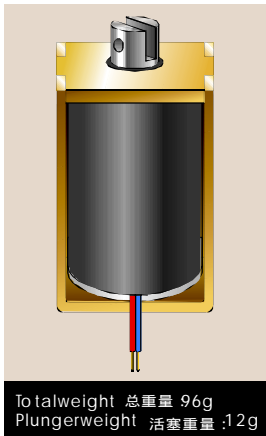


## ORDERING INFORMATION

代号编排

SD O-08 37 L- \* \* \*

ZANTY 宗泰  
Open Frame Solenoid 开置式螺线管  
Plunger dia(mm) 滑杆直径(mm)  
Frame length(mm) 框架长度(mm)

Coil Resistance 线圈电阻 : \* Ω  
Serial Number 序号  
Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V  
L: Pull Type 吸入式 S: Push Type 推出式

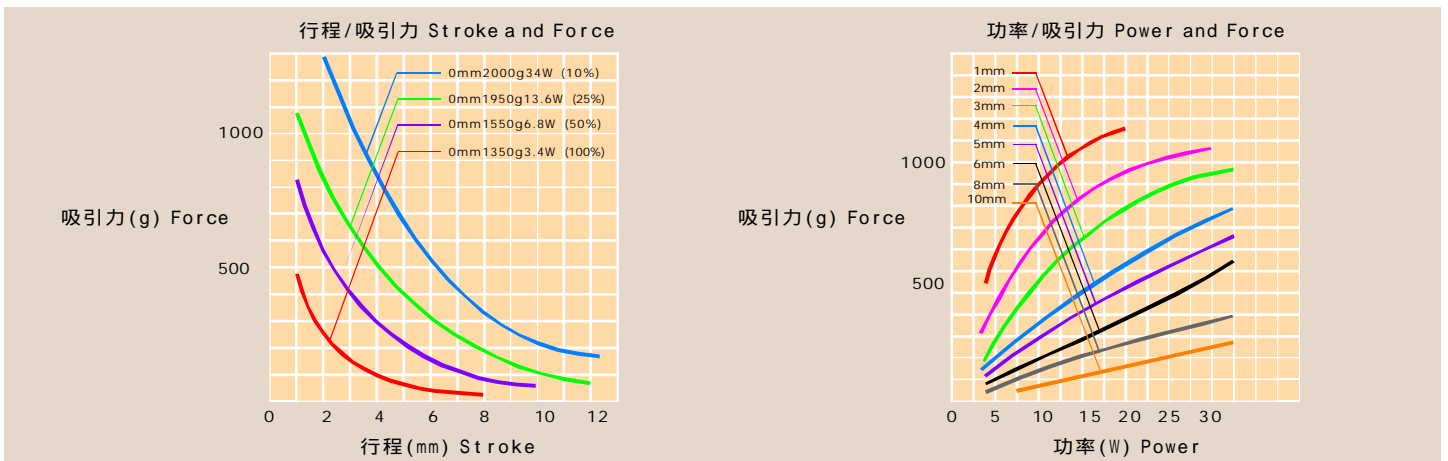

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time/"ON" time+"OFF" time	100%	50%	25%	10%	
	连通 continuous	间断 intermittent			
最大ON时间 (秒) MAX "ON" Time in second	-	100	36	7	
20°C 时的功率 watt at 20°C	4	8	16	40	
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-0837L-06A	9	6	8.5	12	19
SDO-0837L-12A	36	12	17	24	38
SDO-0837L-24A	144	24	34	48	76
SDO-0837L-48A	576	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112  
Tel.: (+86-755) 2854 3752, 28542115 Fax: (+86-755) 28543458  
E-mail: zanty@public.szptt.net.cn Website: www.zanty.com