
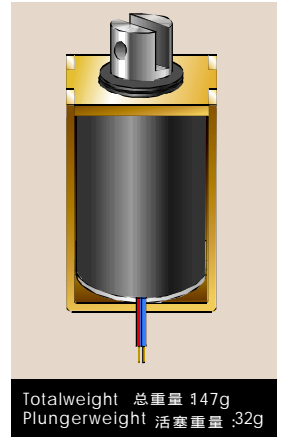


# OPEN FRAME SOLENOID SDO-1240L

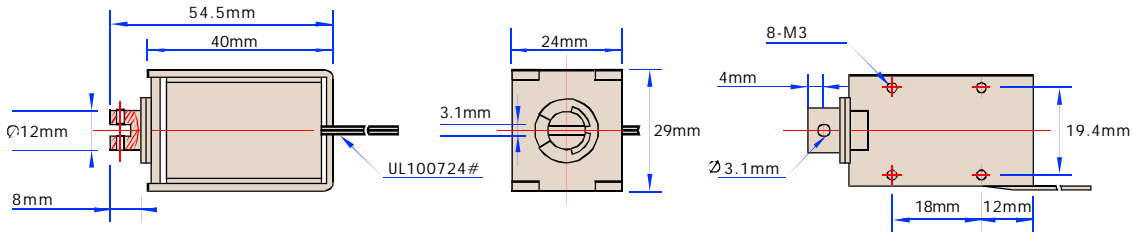


## ORDERING INFORMATION

代号编排


SD O-12 40 L- \* \* \*

ZANTY 宗泰  
 OpenFrame Solenoid 开置式螺线管  
 Plunger dia(mm) 滑杆直径(mm)  
 Frame length(mm) 框架长度(mm)  
 Coil Resistance 线圈电阻: \* Ω  
 Serial number 序号  
 Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V  
 L: Pull Type 吸入式 S: Push Type 推出式

行程/吸引力 Stroke and Force

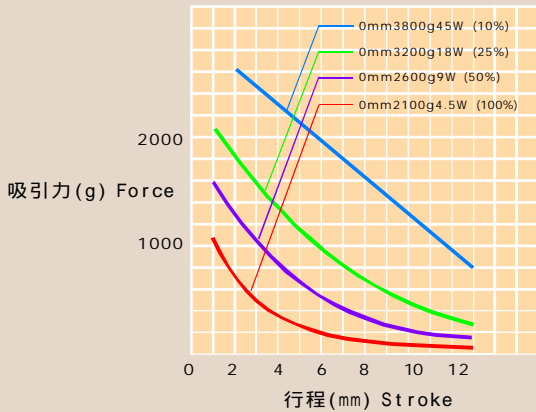

功率/吸引力 Power and Force

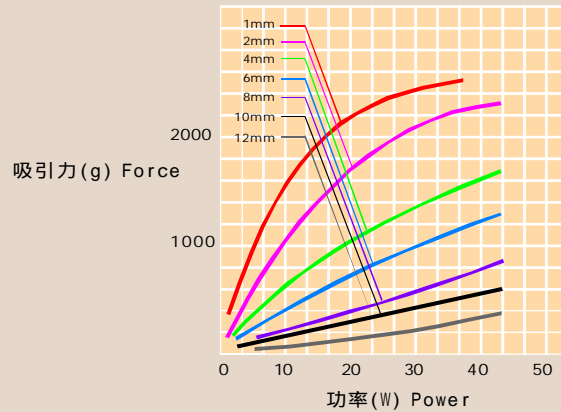

动作周期 (100%) ON时间/ON时间+OFF时间 Dutycycle(100%) "ON" time/"ON" time + "OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	140	50	9
20°C时的功率 watt at 20°C		4.5	9	18	45
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-1240L-06A	8	6	8.5	12	19
SDO-1240L-12A	32	12	17	24	38
SDO-1240L-24A	128	24	34	48	76
SDO-1240L-48A	512	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112  
 Tel.: (+86-755) 2854 3752, 28542115 Fax: (+86-755) 28543458  
 E-mail: zanty@public.szptt.net.cn Website: www.zanty.com