

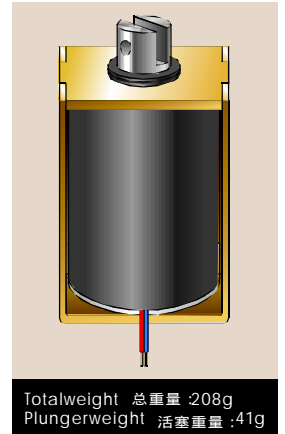


OPEN FRAME SOLENOID SDO-1250L

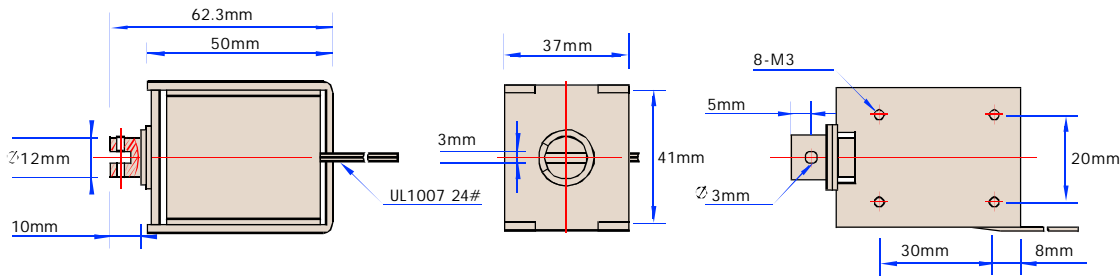

ORDERING INFORMATION 代号编排

SD O-12 50 L- * * *
 ZANTY 宗泰 ————— Coil Resistance 线圈电阻: * Ω
 Open Frame Solenoid 开置式螺线管 ————— Serial number 序号
 Plunger dia(mm) 滑杆直径(mm) ————— Voltage 电压 :06:DC6V 12:DC12V
 Frame length(mm) 框架长度(mm) ————— 24:DC24V 48:DC48V
 L: Pull Type 吸入式 S: Push Type 推出式

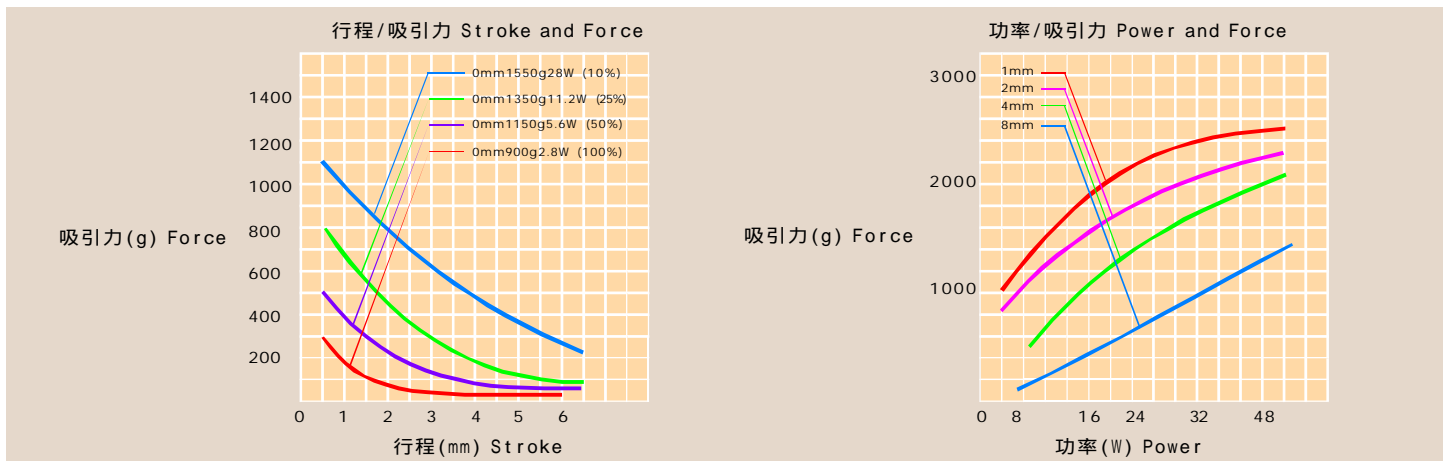

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time/"ON" time + "OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	140	50	9
20°C 时的功率 watt at 20°C		5.5	11	22	55
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-1250L-06A	6.5	6	8.5	12	19
SDO-1250L-12A	26.2	12	17	24	38
SDO-1250L-24A	105	24	34	48	76
SDO-1250L-48A	419	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building A2,B2,C2, Jihua Industry District, Shenzhen, China. P.C.: 518112
 Tel.: (+86-755) 2854 3752, 28542115 Fax: (+86-755) 28543458
 E-mail: zanty@public.szptt.net.cn Website: www.zanty.com